


FIREPLACE #200-2

The flat side of each block must be put towards inside the fireplace. On this model, it is mandatory to put the plate (painted steel or enamelled cast iron) to be sure the smoke can be ejected by the chimney, not by its front. It is strongly recommended to put in place the slides to support the plate and to apply a joint of silicone between every row of the chimney to prevent the smoke from escaping between the rows. Visit www.feuardent.com (Assembly section) for advices and assembly's pictures of your fireplace and the available accessories. For outdoor use only.

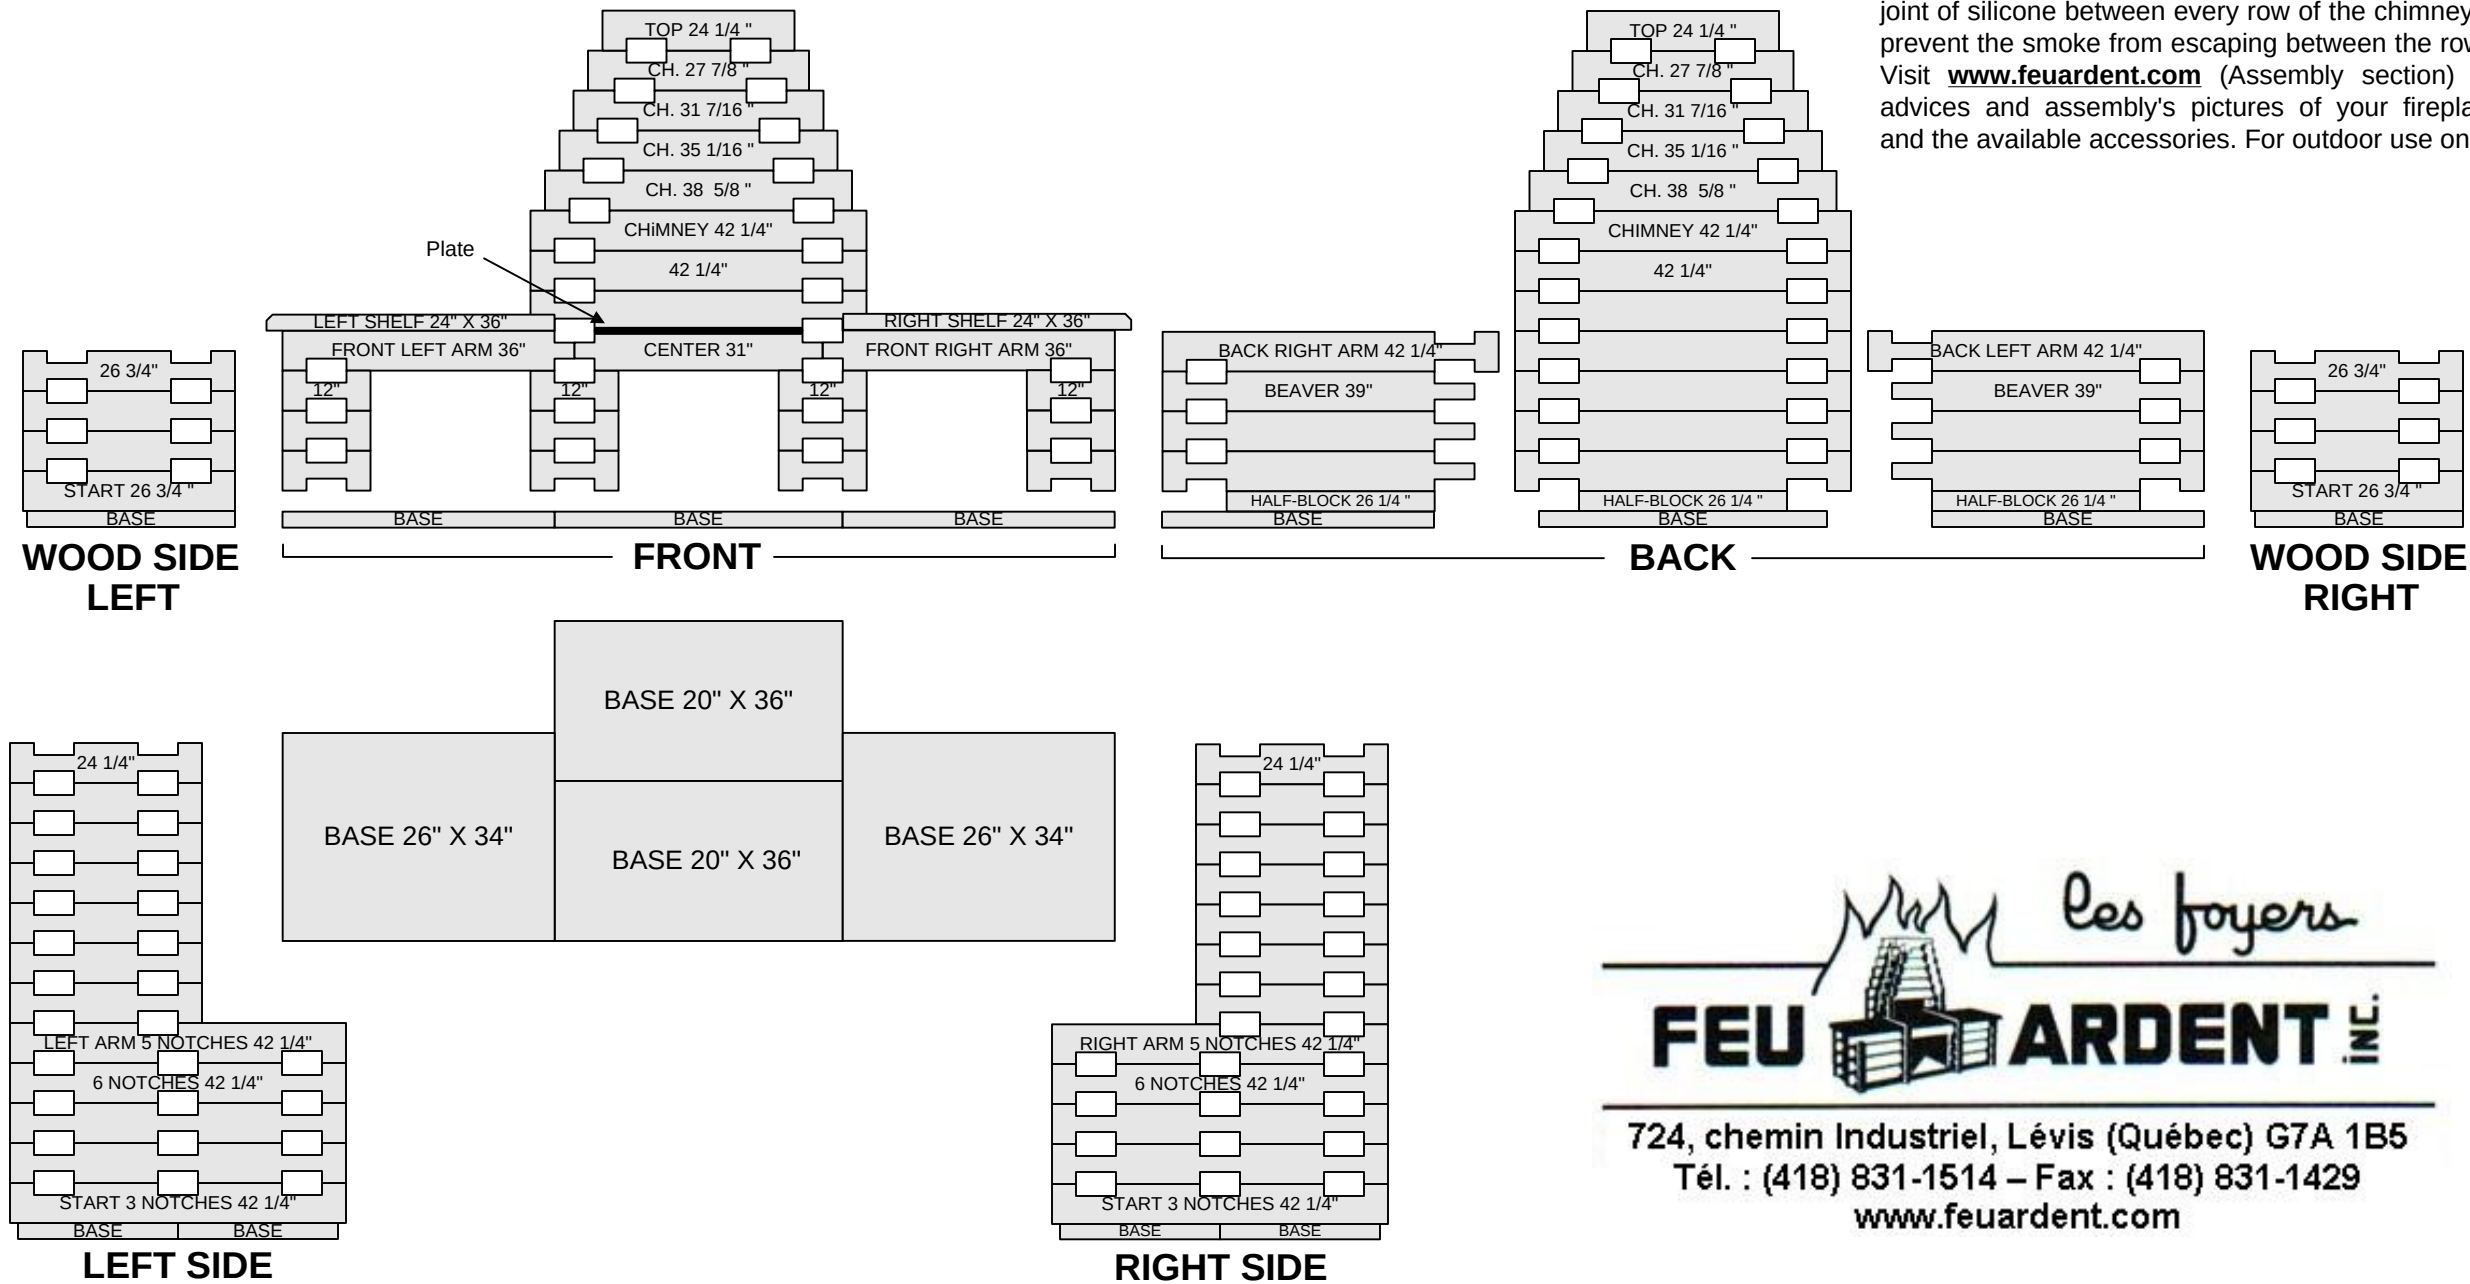

Les foyers

FEU ARDENT

724, chemin Industriel, Lévis (Québec) G7A 1B5
Tél. : (418) 831-1514 – Fax : (418) 831-1429
www.feuardent.com